PRODUCT SELECTION GUIDE — FULL SPECIFICATION CATALOG

Fireclay Kitchen Sink Collection

25 fireclay models — farmhouse, workstation, undermount and dual-color designs, 1280°C kiln-fired with a non-porous glazed surface. Data per official production drawings.

cUPC • CE • UKCA • WaterMark — AVAILABLE ON REQUEST | ISO 9001

25 *	100+	600K
SINK MODELS	MOQ (PCS / MODEL)	ANNUAL CAPACITY (PCS)

* 19 sink models; 46 products across three categories.

106,000 m² CAMPUS ZONING PLAN

Global Manufacturing Excellence in Ceramic Sanitary Ware

Established in 2016 in Tangshan—China's premier ceramic hub—Taitao is a high-tech manufacturer and wholesaler dedicated to premium sanitary ware solutions.

- **Massive Scale**
  A state-of-the-art facility spanning 106,000+ m²
- **Core Products**
  Professional-grade Ceramic Kitchen Sinks, High-End Toilets, and Wash Basins.
- **Global Reach**
  Primary export markets: North America, Europe (including the United Kingdom), and Oceania (Australia and New Zealand).

Manufacturing Capabilities & Core Technology

Our facilities are engineered for precision and high-volume supply, ensuring reliability for:

Advanced Sanitaryware High-Pressure Casting Equipment: 1 10-mould high-pressure toilet casting machine · 3 12-mould sink high-pressure casting machines · 2 8-mould sink high-pressure casting machines · 1 10-double-mould tank high-pressure casting machine · 43 low-pressure fast-drainage vertical casting lines.

High-Capacity Kilns: Utilizing a 96-meter tunnel kiln and a 128m³ shuttle kiln, we achieve an annual production capacity of 600,000 pieces.

Core Technology: 1200–1280°C tunnel-kiln firing gives every piece a dense, non-porous glazed surface for maximum durability, stain resistance and a premium finish.






APRON FARMHOUSE WORKSTATION • SINGLE BASIN + SELF-TRIMMING APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025T-Series

Size: **762 x 508 x 254 mm**
Inner Basin: **713 x 458 x 225 mm**
Weight:

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days

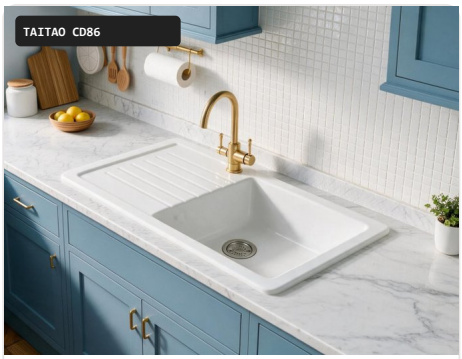

TOPMOUNT CERAMIC INSET SINK • SINGLE BOWL

33-Inch Topmount Ceramic Inset Sink

Size: **860 x 500 x 222 mm**
Inner Basin: **400 x 435 x 200 mm**
Weight: **24.75 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



TOPMOUNT CERAMIC INSET SINK • SINGLE BOWL

39-Inch Single Bowl Topmount Ceramic Inset Sink

Size: **1000 x 500 x 222 mm**
Inner Basin: **400 x 455 x 200 mm**
Weight: **30.95 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



TOPMOUNT CERAMIC INSET SINK • 1.5 BOWL

39-Inch 1.5 Bowl Topmount Ceramic Inset Sink

Size: **1000 x 500 x 225 mm**
Inner Basin: **400 x 325 x 200 mm**
Weight: **30.95 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • DOUBLE BASIN + WORKSTATION LEDGE

33 & 36-Inch Apron Farmhouse Workstation Sink

Size: **838 x 510 x 254 mm**
Inner Basin: **810 x 460 x 230 mm**
Weight: **50.15 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025-Series

Size: **756 x 510 x 251 mm**
Inner Basin: **706 x 460 x 222 mm**
Weight: **43.95 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025K-Series

Size: **756 x 510 x 254 mm**
Inner Basin: **706 x 460 x 226 mm**
Weight: **45.75 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • SINGLE BASIN + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025U-Series

Size: **756 x 510 x 254 mm**
Inner Basin:
Weight: **46.2 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE • SINGLE BASIN

36-Inch Apron Farmhouse Sink

Size: **908 x 502 x 251 mm**
Inner Basin: **864 x 458 x 222 mm**
Weight: **50.15 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



DOUBLE BOWL FARMHOUSE • 50/50 DOUBLE EQUAL BASIN

33-Inch Double Bowl Farmhouse Sink

Size: **826 x 502 x 251 mm**
Inner Basin: **380 x 458 x 222 mm (each basin)**
Weight: **48.85 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



FLUTED APRON FARMHOUSE • SINGLE BASIN

33-Inch Single Basin Fluted Apron Farmhouse Sink · S12132

Size: **832 x 502 x 251 mm**
Inner Basin:
Weight: **45.3 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE • EXTRA DEEP SINGLE BASIN

30-Inch Apron Farmhouse Sink

Size: **756 x 502 x 251 mm**
Inner Basin:
Weight: **42 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



UNDERMOUNT SERIES • SINGLE BASIN

30-Inch Undermount Series Sink

Size: **762 x 457 x 254 mm**
Inner Basin:
Weight: **33.3 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



UNDERMOUNT SERIES • SINGLE BASIN UNDERMOUNT

27 & 32-Inch Undermount Series Sink

Size: **680 x 486 x 254 mm**
Inner Basin: **599 x 404 x 226 mm**
Weight:

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FRONT / UNDERMOUNT • SINGLE BASIN + APRON FRONT OR UNDERMOUNT INSTALL

33-Inch Apron Front / Undermount Sink

Size: **838 x 457 x 254 mm**
Inner Basin: **799 x 418 x 226 mm**
Weight:

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



FLUTED APRON FARMHOUSE • SINGLE BASIN + FLUTED APRON FRONT

33-Inch Single Basin Fluted Apron Farmhouse Sink · S331820P

Size: **838 x 457 x 254 mm**
Inner Basin: **799 x 418 x 226 mm**
Weight:

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days




APRON FARMHOUSE WORKSTATION • SINGLE BASIN + SMOOTH APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-Series

Size: **838 x 510 x 254 mm**
Inner Basin: **790 x 460 x 228 mm**
Weight: **50.8 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days

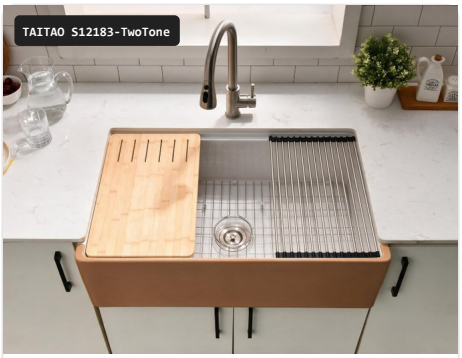


APRON FARMHOUSE WORKSTATION • SINGLE BASIN + TWO-TONE APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-TwoTone

Size: **838 x 510 x 254 mm**
Inner Basin: **790 x 460 x 228 mm**
Weight: **50.8 KG**

Scan for full specification & drawings
Finish: Two-Tone: Glossy White Interi…
MOQ 100 pcs · Lead time 30 days

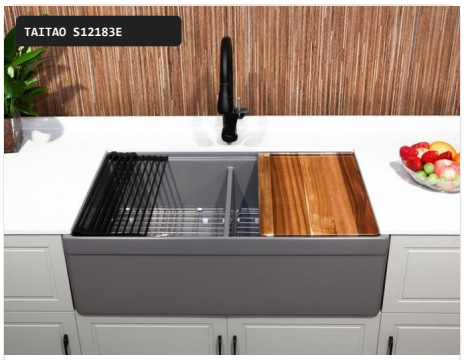

DOUBLE BOWL FARMHOUSE WORKSTATION • 50/50 DOUBLE EQUAL BASIN + SMOOTH APRON + WORKSTATION LEDGE

33-Inch Double Bowl Farmhouse Workstation Sink

Size: **838 x 510 x 254 mm**
Inner Basin: **788 x 460 x 228 mm, both basins combined**
Weight: **53.95 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



DUAL-COLOR WORKSTATION • SINGLE BASIN + TRACK

24-Inch Dual-Color Workstation Sink

Size: **610 x 510 x 254 mm**
Inner Basin: **582 x 460 x 226 mm**
Weight: **35.65 KG**

Scan for full specification & drawings
Finish: Dual-Color (Black & White)
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • SINGLE BASIN + WORKSTATION LEDGE

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014

Size: **838 x 510 x 254 mm**
Inner Basin: **810 x 460 x 230 mm**
Weight: **46.25 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • SINGLE BASIN + WORKSTATION LEDGE + DUAL BAR APRON

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014H

Size: **838 x 510 x 254 mm**
Inner Basin: **788 x 460 x 227 mm**
Weight: **45.8 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE SINK • SINGLE BASIN HEAVY APRON-FRONT

33-Inch Apron Farmhouse Sink

Size: **838 x 510 x 254 mm**
Inner Basin: **778 x 480 x 238 mm**
Weight: **49.35 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • DOUBLE BASIN (50/50) + WORKSTATION LEDGE + FLUTED APRON

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025KE

Size: **838 x 510 x 254 mm**
Inner Basin: **788 x 460 x 226 mm**
Weight: **53.15 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



APRON FARMHOUSE WORKSTATION • DOUBLE BASIN (50/50) + WORKSTATION LEDGE + REVERSIBLE FLUTED APRON

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025E

Size: **838 x 510 x 251 mm**
Inner Basin: **788 x 504 x 222 mm**
Weight: **52.65 KG**

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days


TAITAO S2025T-Series

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025T-Series


FARMHOUSE • SMOOTH • SINGLE BASIN + SELF-TRIMMING APRON + WORKSTATION LEDGE



30-INCH DRAWING

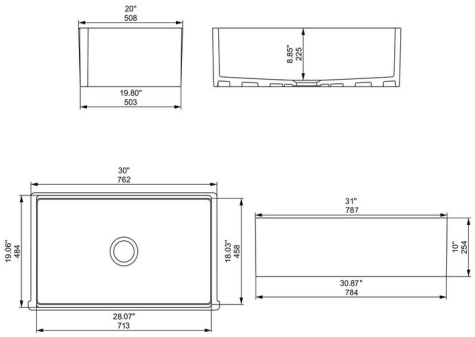

33-INCH DRAWING

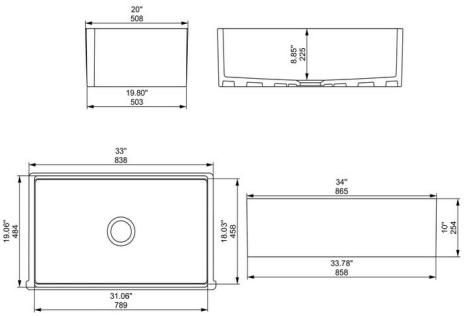

PRODUCT VIEW

Total Width (Outer)	**30.0 inches (762 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (508 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**28.07" x 18.03" x 8.85" (713 x 458 x 225 mm)**
Wall Rim Thickness	**0.98" (25mm) Self-Trimming Apron**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Self-Trimming Apron
- Single Bowl Workstation Ledge
- 30″ & 33″ Dual Sizes
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO CD86

33-Inch Topmount Ceramic Inset Sink

TOPMOUNT • TOPMOUNT-RIM • SINGLE BOWL



PRODUCT VIEW

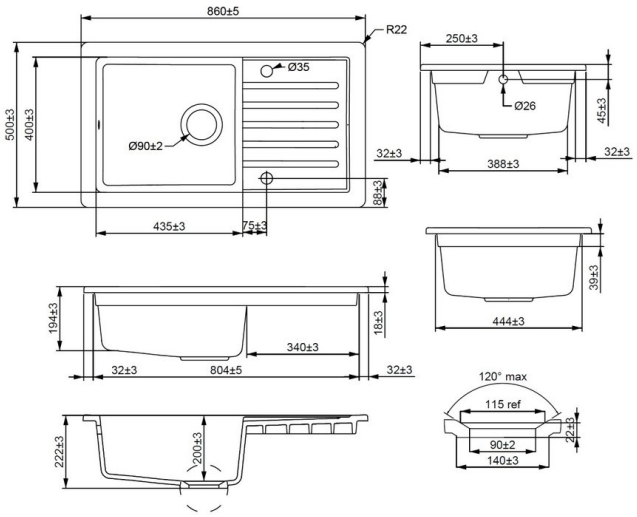

DIMENSIONAL DRAWING

Total Width (Outer)	**33.86 inches (860 mm ± 5mm)**
Min Base Cabinet	**36" (90 cm)**
Total Depth (Outer)	**19.69 inches (500 mm ± 3mm)**
Total Height (Outer)	**8.74 inches (222 mm ± 3mm)**
Inner Basin (L x W x D)	**15.75" x 17.13" x 7.87" (400 x 435 x 200 mm)**
Wall Rim Thickness	**0.71" (18mm ± 3mm) Inset Rim**
Net Weight	**24.75 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A — solid reinforced rim design**
Installation Mountings:	**Topmount / Drop-In, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Reversible Drainer
- Compact 33.86" / 860mm Fit
- 24.75kg Lightweight
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark — AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO CD100

39-Inch Single Bowl Topmount Ceramic Inset Sink

TOPMOUNT • TOPMOUNT-RIM • SINGLE BOWL



PRODUCT VIEW

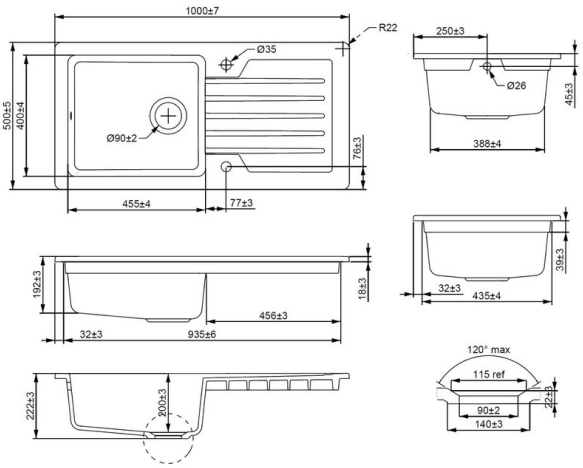

DIMENSIONAL DRAWING

Total Width (Outer)	**39.37 inches (1000 mm ± 7mm)**
Min Base Cabinet	**42" (105 cm)**
Total Depth (Outer)	**19.69 inches (500 mm ± 5mm)**
Total Height (Outer)	**8.74 inches (222 mm ± 3mm)**
Inner Basin (L x W x D)	**15.75" x 17.91" x 7.87" (400 x 455 x 200 mm)**
Wall Rim Thickness	**0.71" (18mm ± 3mm) Inset Rim**
Net Weight	**30.95 KG**
Manufacturing Tolerance	**±7mm Width, ±5mm Depth, ±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A — solid reinforced rim design**
Installation Mountings:	**Topmount / Drop-In, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Reversible Drainer
- Extra-Long 39.37" / 1000mm Basin
- 30.95kg Full-Size
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark — AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO CD150

39-Inch 1.5 Bowl Topmount Ceramic Inset Sink

TOPMOUNT • TOPMOUNT-RIM • 1.5 BOWL



PRODUCT VIEW

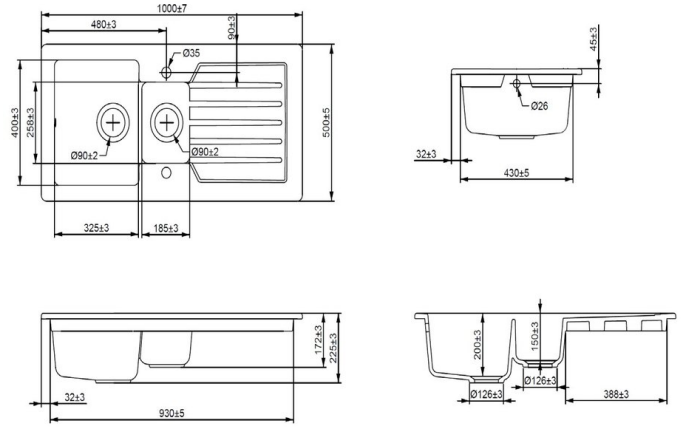

DIMENSIONAL DRAWING

Total Width (Outer)	**39.37 inches (1000 mm ± 7mm)**
Min Base Cabinet	**42" (105 cm)**
Total Depth (Outer)	**19.69 inches (500 mm ± 5mm)**
Total Height (Outer)	**8.86 inches (225 mm ± 3mm)**
Inner Basin (L x W x D)	**15.75" x 12.80" x 7.87" (400 x 325 x 200 mm)**
Wall Rim Thickness	**0.71" (18mm ± 3mm) Inset Rim**
Net Weight	**30.95 KG**
Manufacturing Tolerance	**±7mm Width, ±5mm Depth, ±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A — solid reinforced rim design**
Installation Mountings:	**Topmount / Drop-In, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- 1.5 Bowl (Main + Half)
- Dual-Zone Wash & Drain
- Reversible Drainer
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark — AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

TAITAO S2014E-Series


33 & 36-Inch Apron Farmhouse Workstation Sink


FARMHOUSE • SMOOTH • DOUBLE BASIN + WORKSTATION LEDGE

33-INCH DRAWING

36-INCH DRAWING



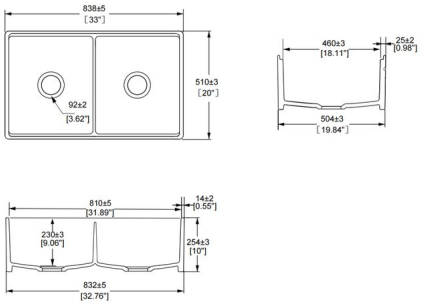

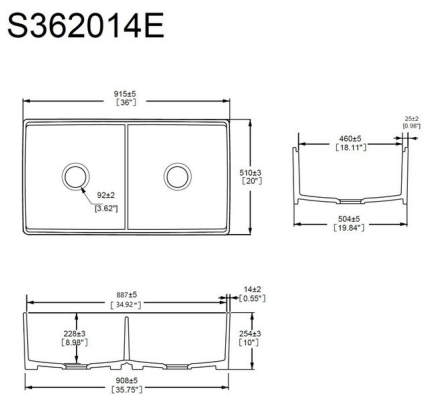

PRODUCT VIEW

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.89" x 18.11" x 9.06" (810 x 460 x 230 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**50.15 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Integrated Workstation Ledge
- Double Bowl Design
- Apron-Front Farmhouse

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

TAITAO S2025-Series


30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025-Series

FARMHOUSE • FLUTED • SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE




30-INCH DRAWING

S302025

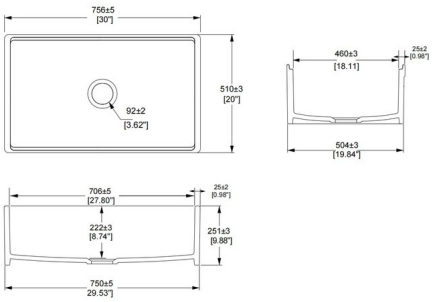

33-INCH DRAWING

S332025

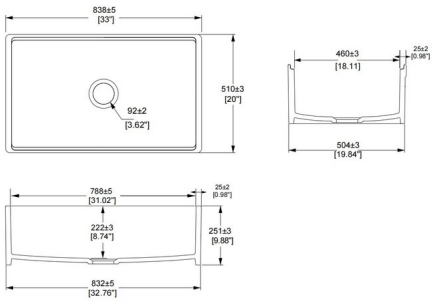

PRODUCT VIEW

Total Width (Outer)	**30.0 inches (756 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**9.88 inches (251 mm ± 3mm)**
Inner Basin (L x W x D)	**27.80" x 18.11" x 8.74" (706 x 460 x 222 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Fluted Apron**
Net Weight	**43.95 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Fluted Apron Front
- Single Bowl Workstation Ledge
- 30" Standard 30.0"
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

TAITAO S2025K-Series


30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025K-Series

FARMHOUSE • FLUTED • SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE




30-INCH DRAWING

S302025K



33-INCH DRAWING

S332025K

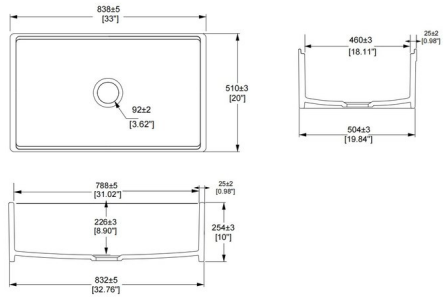

PRODUCT VIEW

Total Width (Outer)	**30.0 inches (756 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**27.80" x 18.11" x 8.90" (706 x 460 x 226 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Fluted Apron**
Net Weight	**45.75 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Fluted Apron Front
- Single Bowl Workstation Ledge
- 30" & 33" Dual Sizes
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

TAITAO S2025U-Series


30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025U-Series

FARMHOUSE • SMOOTH • SINGLE BASIN + WORKSTATION LEDGE




30-INCH DRAWING

S302025U

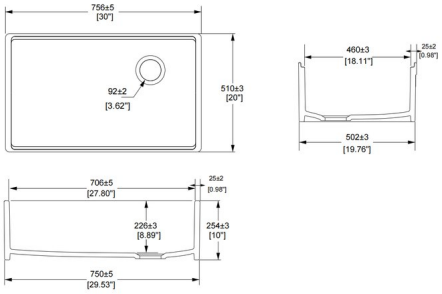

33-INCH DRAWING

S332025U

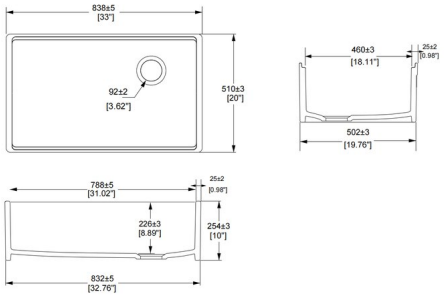

PRODUCT VIEW

Total Width (Outer)	**30.0 inches (756 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**27.80" x 18.11" x 8.89" (706 x 460 x 226 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**46.2 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Smooth Apron Front
- Dual-Size 30″ & 33″
- Integrated Workstation Ledge
- 1280°C Fireclay Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12108

36-Inch Apron Farmhouse Sink

FARMHOUSE • SMOOTH • SINGLE BASIN



PRODUCT VIEW

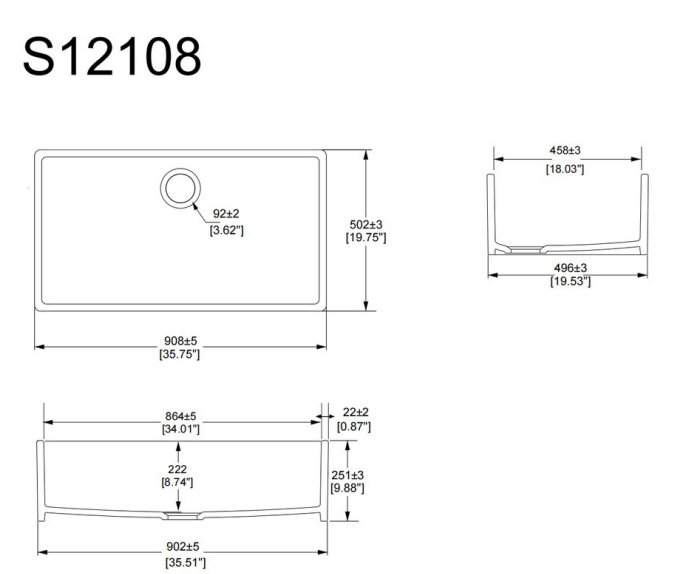

DIMENSIONAL DRAWING

Total Width (Outer)	**35.75 inches (908 mm ± 5mm)**
Min Base Cabinet	**39" (99 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**19.75 inches (502 mm ± 3mm)**
Total Height (Outer)	**9.88 inches (251 mm ± 3mm)**
Inner Basin (L x W x D)	**34.01" x 18.03" x 8.74" (864 x 458 x 222 mm)**
Wall Rim Thickness	**0.87" (22mm ± 2mm) Apron**
Net Weight	**50.15 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Smooth Apron Front
- 36-Inch Wide Basin
- Extra-Deep 8.74" Bowl
- 1280°C Fireclay Core
- Non-Porous Glaze

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12126

33-Inch Double Bowl Farmhouse Sink

DOUBLE-BOWL • SMOOTH • 50/50 DOUBLE EQUAL BASIN



PRODUCT VIEW

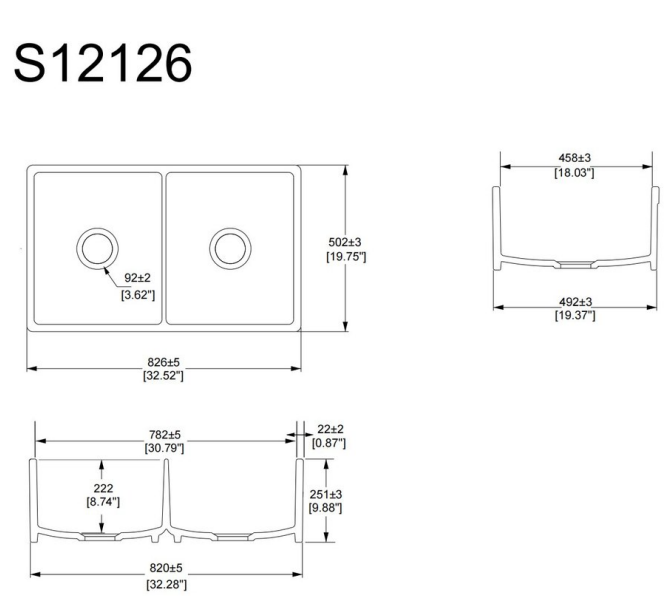

DIMENSIONAL DRAWING

Total Width (Outer)	**32.52 inches (826 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**19.75 inches (502 mm ± 3mm)**
Total Height (Outer)	**9.88 inches (251 mm ± 3mm)**
Inner Basin (L x W x D)	**14.96" x 18.03" x 8.74" (380 x 458 x 222 mm (each basin))**
Wall Rim Thickness	**0.87" (22mm ± 2mm) Apron**
Net Weight	**48.85 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Dual Equal Chambers
- Center Divider Support
- Dual 3.5" Drains
- ±5mm Width Tolerance

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12132

33-Inch Single Basin Fluted Apron Farmhouse Sink · S12132

FARMHOUSE • FLUTED • SINGLE BASIN



PRODUCT VIEW

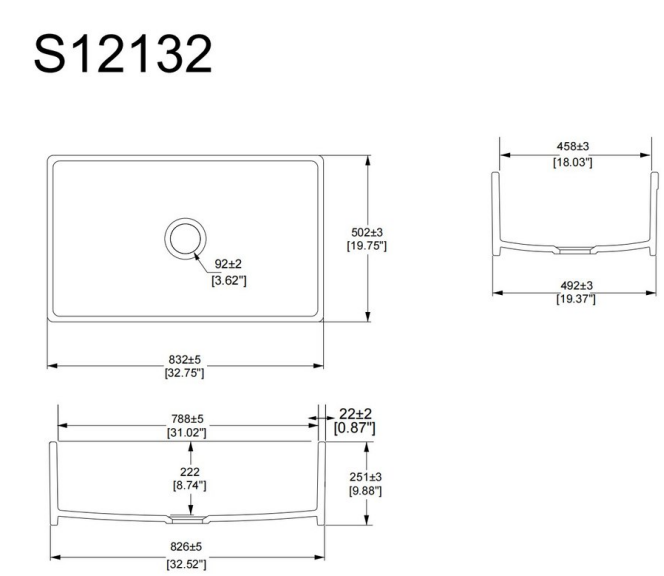

DIMENSIONAL DRAWING

Total Width (Outer)	**32.75 inches (832 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**19.75 inches (502 mm ± 3mm)**
Total Height (Outer)	**9.88 inches (251 mm ± 3mm)**
Inner Basin (L x W x D)	**31.02" x 18.03" x 8.74" (788 x 458 x 222 mm)**
Wall Rim Thickness	**0.87" (22mm ± 2mm) Apron**
Net Weight	**45.3 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Decorative Fluted Apron Front
- High-Pressure Casting
- 1280°C Solid-Core Kiln Firing
- Non-Porous Stain-Resistant Glaze

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12156

30-Inch Apron Farmhouse Sink

FARMHOUSE • SMOOTH • EXTRA DEEP SINGLE BASIN



PRODUCT VIEW

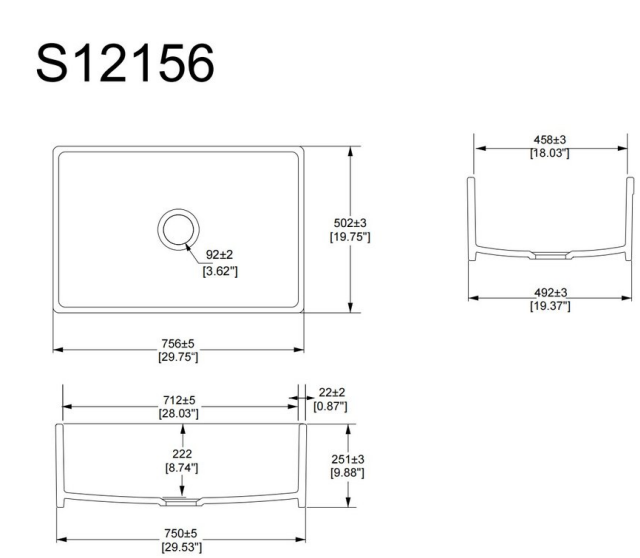

DIMENSIONAL DRAWING

Total Width (Outer)	**29.75 inches (756 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**19.75 inches (502 mm ± 3mm)**
Total Height (Outer)	**9.88 inches (251 mm ± 3mm)**
Inner Basin (L x W x D)	**28.03" x 18.03" x 8.74" (712 x 458 x 222 mm)**
Wall Rim Thickness	**0.87" (22mm ± 2mm) Apron**
Net Weight	**42 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Smooth Apron Front
- 29.75" Wide-Body
- Extra-Deep 28.03" Basin
- 1280°C Kiln Firing
- Non-Porous Glaze

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12162

30-Inch Undermount Series Sink

UNDERMOUNT • UNDERMOUNT-RIM • SINGLE BASIN



PRODUCT VIEW

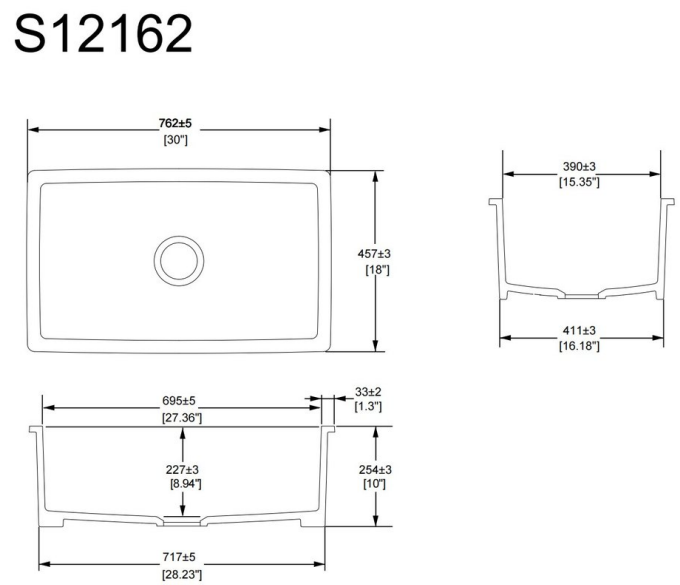

DIMENSIONAL DRAWING

Total Width (Outer)	**30.0 inches (762 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**18.0 inches (457 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**27.36" x 15.35" x 8.94" (695 x 390 x 227 mm)**
Wall Rim Thickness	**0.71" (18mm)**
Net Weight	**33.3 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Undermount / Drop-In (Topmount)**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Seamless Undermount Rim
- Flat Mounting Edge
- Non-Porous Glaze
- Heavy-Duty Fireclay

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S1915-Series

27 & 32-Inch Undermount Series Sink


UNDERMOUNT • UNDERMOUNT-RIM • SINGLE BASIN UNDERMOUNT



27-INCH DRAWING



32-INCH DRAWING

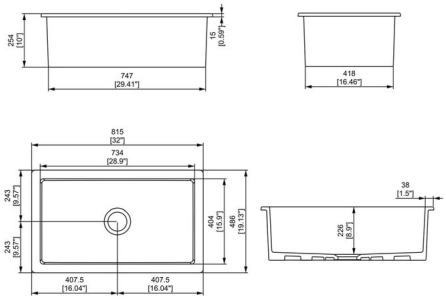

PRODUCT VIEW

Total Width (Outer)	**26.77 inches (680 mm ± 5mm)**
Min Base Cabinet	**30" (76 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**19.13 inches (486 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**23.58" x 15.9" x 8.9" (599 x 404 x 226 mm)**
Wall Rim Thickness	**0.59" (15mm)**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Seamless Undermount Rim
- 27″ & 32″ Two Sizes
- Flat Mounting Edge
- Non-Porous Glaze
- Heavy-Duty Fireclay

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S331820

33-Inch Apron Front / Undermount Sink

FARMHOUSE • SMOOTH • SINGLE BASIN + APRON FRONT OR UNDERMOUNT INSTALL



PRODUCT VIEW

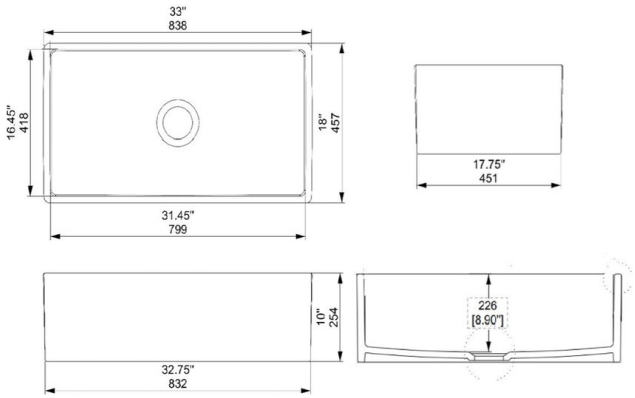

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**18.0 inches (457 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.45" x 16.45" x 8.90" (799 x 418 x 226 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse / Undermount**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Apron Front or Undermount Install
- 33″ Single Bowl
- 1280°C Kiln Firing
- Non-Porous Glaze

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S331820P

33-Inch Single Basin Fluted Apron Farmhouse Sink · S331820P

FARMHOUSE • FLUTED • SINGLE BASIN + FLUTED APRON FRONT



PRODUCT VIEW

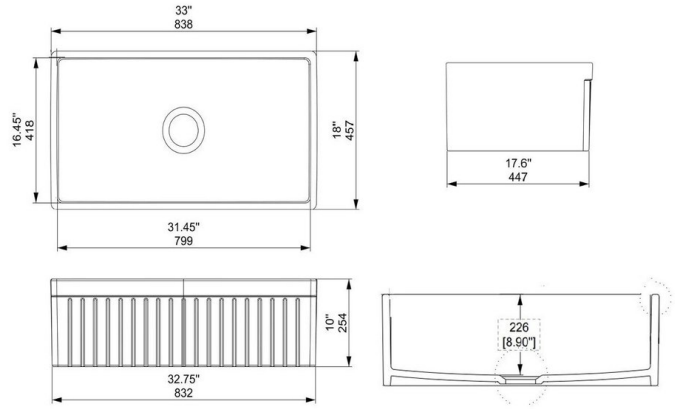

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**18.0 inches (457 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.45" x 16.45" x 8.90" (799 x 418 x 226 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Fluted Apron Front
- 33″ Single Bowl
- 1280°C Kiln Firing
- Non-Porous Glaze

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12183-Series

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-Series


FARMHOUSE • SMOOTH • SINGLE BASIN + SMOOTH APRON + WORKSTATION LEDGE



30-INCH DRAWING

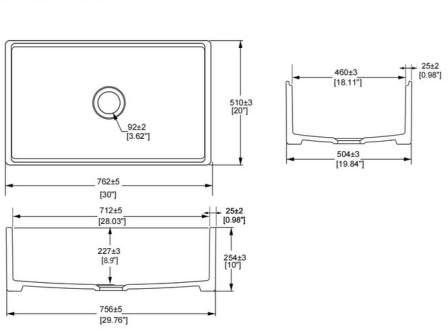

33-INCH DRAWING

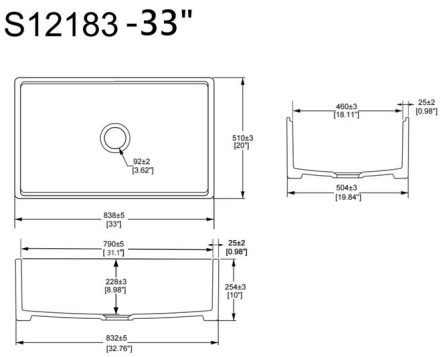

PRODUCT VIEW

Total Width (Outer)	**30.0 inches (762 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**28.03" x 18.11" x 8.9" (712 x 460 x 227 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**41.25 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Smooth Apron Front
- Single Bowl Workstation Ledge
- Dual-Size 30″ & 33″
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12183-TwoTone

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-TwoTone


FARMHOUSE • SMOOTH • SINGLE BASIN + TWO-TONE APRON + WORKSTATION LEDGE



30-INCH DRAWING

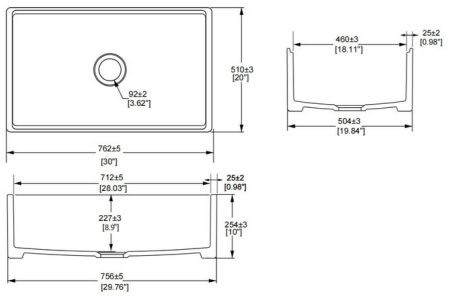

33-INCH DRAWING

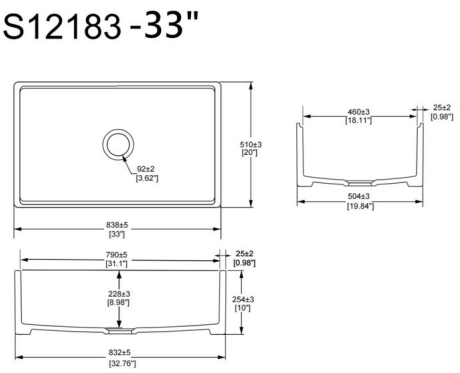

PRODUCT VIEW

Total Width (Outer)	**30.0 inches (762 mm ± 5mm)**
Min Base Cabinet	**33" (84 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**28.03" x 18.11" x 8.9" (712 x 460 x 227 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**41.25 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Two-Tone Multi-Color Apron
- 30" & 33" Dual-Size
- Integrated Workstation Ledge
- Solid Fireclay 1280°C Core
- Reversible Basin Drain

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S12183E

33-Inch Double Bowl Farmhouse Workstation Sink

FARMHOUSE • SMOOTH • 50/50 DOUBLE EQUAL BASIN + SMOOTH APRON + WORKSTATION LEDGE



PRODUCT VIEW

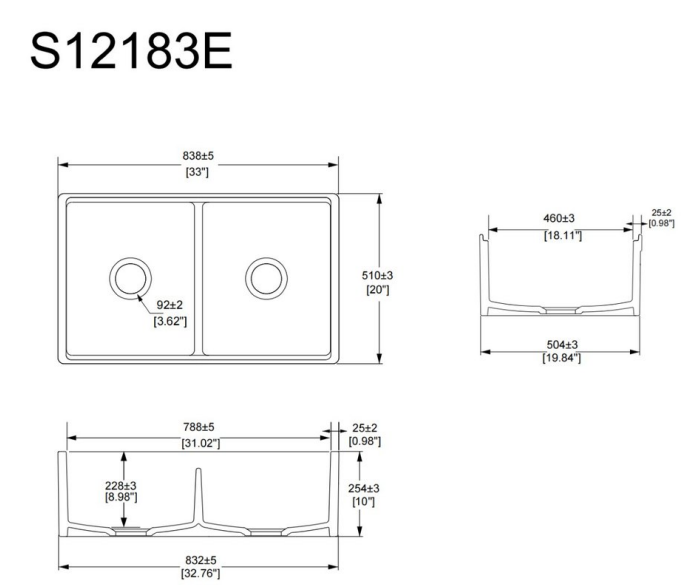

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.02" x 18.11" x 8.98" (788 x 460 x 228 mm, both basins combined)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**53.95 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Depth, ±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- 50/50 Double Equal Bowl
- Integrated Workstation Ledge
- Smooth Apron Front
- Dual 3.5" Drains
- White / Matte Gray / Matte Black

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S242014

24-Inch Dual-Color Workstation Sink

DUAL-COLOR • DUAL-COLOR • SINGLE BASIN + TRACK



PRODUCT VIEW

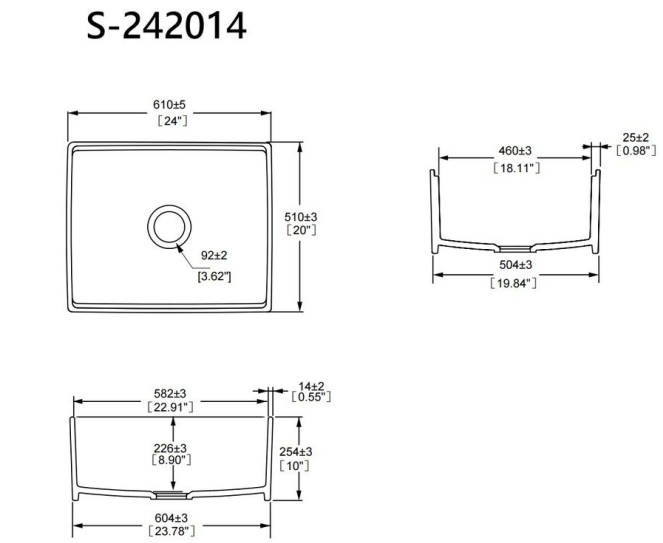

DIMENSIONAL DRAWING

Total Width (Outer)	**24.0 inches (610 mm ± 5mm)**
Min Base Cabinet	**27" (69 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**22.9" x 18.1" x 8.9" (582 x 460 x 226 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**35.65 KG**
Manufacturing Tolerance	**±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE Standard**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Dual-Color Glaze
- Built-in Accessory Ledge
- 1280°C Fireclay Core
- Non-Porous Finish

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S332014

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014

FARMHOUSE • SMOOTH • SINGLE BASIN + WORKSTATION LEDGE



PRODUCT VIEW

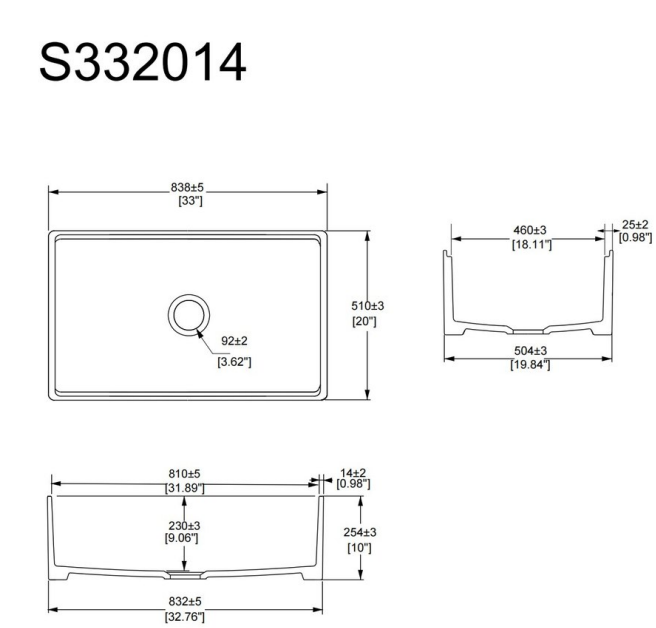

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.89" x 18.11" x 9.06" (810 x 460 x 230 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**46.25 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Smooth Apron Front
- 33" Wide-Basin 31.89"
- Integrated Workstation Ledge
- 1280°C Fireclay Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S332014H

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014H

FARMHOUSE • SMOOTH • SINGLE BASIN + WORKSTATION LEDGE + DUAL BAR APRON



PRODUCT VIEW

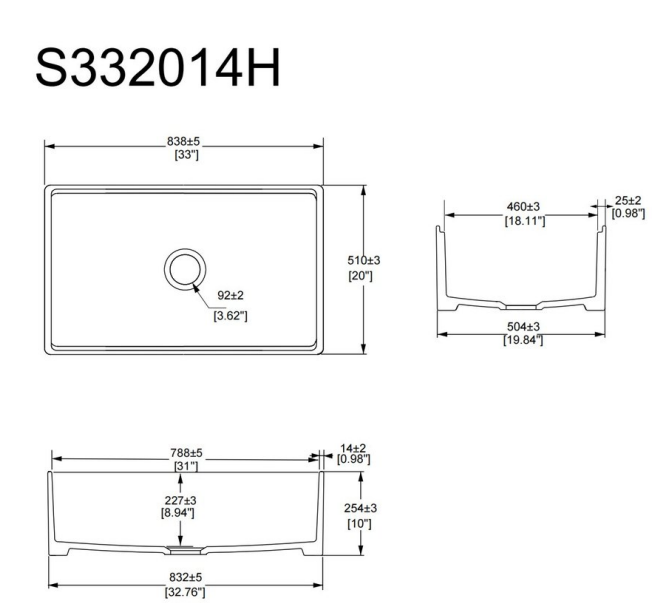

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.0" x 18.11" x 8.94" (788 x 460 x 227 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**45.8 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Dual-Bar Apron Front
- Integrated Workstation Ledge
- High-Pressure Casting
- 1280°C Solid-Core Kiln Firing

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page
and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S332018P

33-Inch Apron Farmhouse Sink

FARMHOUSE • SMOOTH • SINGLE BASIN HEAVY APRON-FRONT



PRODUCT VIEW

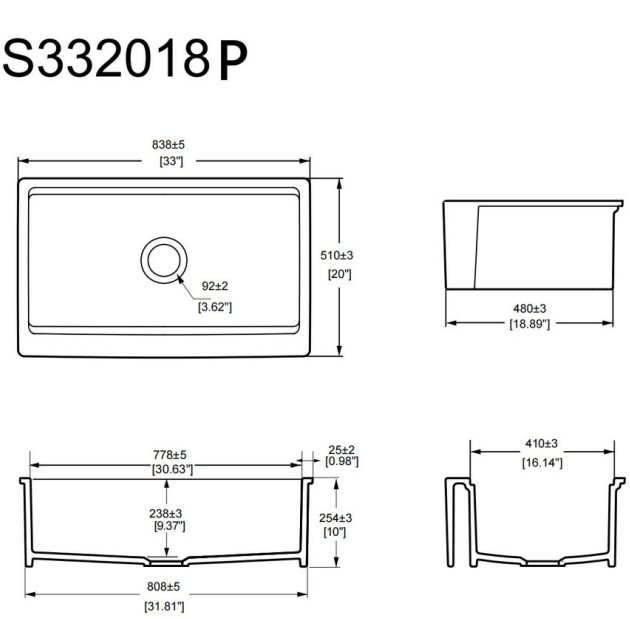

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**30.63" x 18.89" x 9.37" (778 x 480 x 238 mm)**
Wall Rim Thickness	**2.76" (70mm ± 2mm) Heavy Apron**
Net Weight	**49.35 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**N/A – solid reinforced rim design**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- 70mm Extra-Thick Apron
- Heavy-Duty 49.35kg
- Apron-Front Farmhouse
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S332025KE

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025KE

FARMHOUSE • FLUTED • DOUBLE BASIN (50/50) + WORKSTATION LEDGE + FLUTED APRON



PRODUCT VIEW

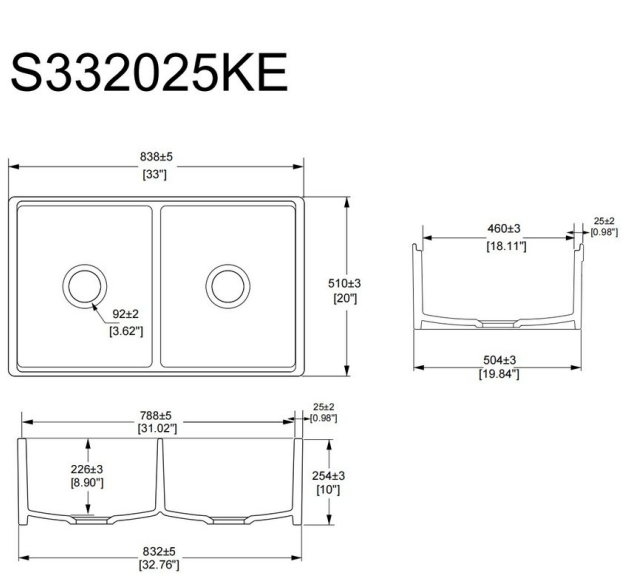

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**10.0 inches (254 mm ± 3mm)**
Inner Basin (L x W x D)	**31.02" x 18.11" x 8.90" (788 x 460 x 226 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Fluted Apron**
Net Weight	**53.15 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Height/Depth**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Fluted Apron Front
- 50/50 Double Bowl Workstation
- Solid Fireclay 1280°C Core

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


TAITAO S332025E

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025E

FARMHOUSE • FLUTED • DOUBLE BASIN (50/50) + WORKSTATION LEDGE + REVERSIBLE FLUTED APRON



PRODUCT VIEW

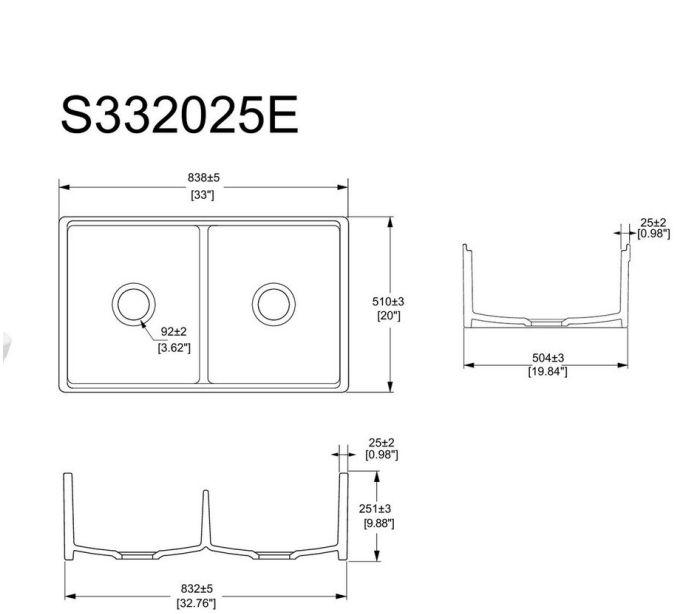

DIMENSIONAL DRAWING

Total Width (Outer)	**33.0 inches (838 mm ± 5mm)**
Min Base Cabinet	**36" (91 cm) – 3" clearance rule: 1.5" per side**
Total Depth (Outer)	**20.0 inches (510 mm ± 3mm)**
Total Height (Outer)	**9.88 inches (251 mm ± 3mm)**
Inner Basin (L x W x D)	**31.02" x 19.84" x 8.74" (788 x 504 x 222 mm)**
Wall Rim Thickness	**0.98" (25mm ± 2mm) Apron**
Net Weight	**52.65 KG**
Manufacturing Tolerance	**±5mm Width, ±3mm Depth, ±3mm Height**
Clay Core Composition:	**Refined Silicate-Alumina Fine Fireclay**
Firing Process:	**Slow Continuous Tunnel Kiln Firing**
Peak Tunnel Kiln Temp:	**1280°C Core Vitrification**
Hydrophobic Glaze:	**Triple-Coated Fused Glass Glaze Sealant**
Thermal Shock Limit:	**FOB Standard Up to 1000°F (538°C)**
Drainage Hole Diameter:	**Standard 3.5 inches (92mm ± 2mm)**
Waste Disposal Fit:	**100% standard flange / disposer compatible**
Workstation Ledge:	**Integrated 0.40" (12mm) stepped dual-tier ledge**
Installation Mountings:	**Apron-Front Farmhouse, Undermount, Flush**
Wholesale Standards:	**cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)**
Transit drop safety:	**ISTA-3A Certified Packaging Drop Test**
B2B Manufacturing Lead:	**30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched**

Key Features

- Fluted Apron Front
- 50/50 Double Bowl
- Integrated Workstation Ledge
- Dual 3.5" Drains
- White / Matte Gray / Matte Black

cUPC • CE • UKCA • WaterMark – AVAILABLE ON REQUEST | ISO 9001

Scan to open the product page and view the drawing set online

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com